



PW Series


Platinum sensor with wires

For extended operating temperature range in class A

Benefits & Characteristics

- Capable of measuring in class A up to +600 °C
- Increased long-term stability
- Alternative to wire-wound sensors
- Short-term applicable up to +750 °C
- Very stable characteristics curve
- Available with same dimensions as a wire-wound sensor
- Very low hysteresis
- Customer-specific sensor available upon request

Illustration¹⁾

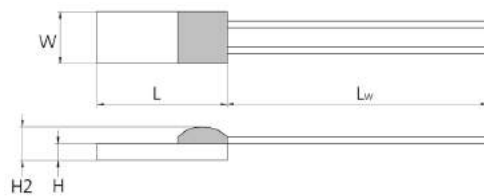

Dimension tolerances: W ±0.2 mm, L ±0.2 mm, H ±0.1 mm, H₂ ±0.3 mm, L_w (up to 30 mm) ±1 mm

¹⁾ For actual size, see dimensions

Technical Data

Operating temperature range:	-200 °C to +600 °C		
Nominal resistance:*	100 Ω at 0 °C 500 Ω at 0 °C 1000 Ω at 0 °C		
Characteristics curve:*	3850 ppm/K		
Long-term stability:	< 0.04 % at 1000 h at maximal operating temperature		
Tolerance class:*		IST AG reference	
	IEC 60751 F0.15	A	-200 °C to +600 °C
	IEC 60751 F0.3	B	-200 °C to +600 °C
	IEC 60751 F0.6	C	-200 °C to +600 °C
	IEC 60751 F0.1	Y	-200 °C to +500 °C
	1/5 IEC 60751 F0.3	K*	-100 °C to +300 °C
Connection:*	Pt-wire, Ø 0.2 mm (solderable, weldable, crimpable, brazeable)		
Alternative wire construction:*	Inverted wires		
Recommended applied current: ¹⁾	0.2 mA at 100 Ω 0.09 mA at 500 Ω 0.06 mA at 1000 Ω		
	¹⁾ Self-heating must be considered		



Other alternatives:*

Housed in round ceramics (for dry environments only) - see data sheet DTP_Round_Housing_E

Grouped and paired

* Customer-specific alternatives available

Order Information - 7W (Pt-wire, Ø 0.2 mm)

Size	Dimensions (L x W x H / H2; L _w in mm)	F0.1 (class Y)	F0.15 (class A)	F0.3 (class B)
Nominal resistance: 100 Ω at 0 °C				
216	2.4 x 1.4 x 0.45 / 0.8; 7.0	PW0K1.216.7W.Y.007	PW0K1.216.7W.A.007	PW0K1.216.7W.B.007
Order code		010.03306	010.03320	010.03321
Nominal resistance: 500 Ω at 0 °C				
216	2.4 x 1.4 x 0.45 / 0.8; 7.0	PW0K5.216.7W.Y.007	PW0K5.216.7W.A.007	PW0K5.216.7W.B.007
Order code		010.03322	010.03323	010.03324
Nominal resistance: 1000 Ω at 0 °C				
216	2.4 x 1.4 x 0.45 / 0.8; 7.0	PW1K0.216.7W.Y.007	PW1K0.216.7W.A.007	PW1K0.216.7W.B.007
Order code		010.03339	010.03344	010.03345

Additional Documents

Application Note:	Document name: ATP_E
-------------------	-------------------------



Order Information

Platinum Sensor

Secondary reference

Material

P = Platinum

TCR

= Pt 3850 ppm/K **G = Pt 3911 ppm/K**
U = Pt 3750 ppm/K **W = Pt 3850 ppm/K (extended operating temperature range in class A)**

Resistance in Ω at 0 °C

Size in mm

Operating temperature range

1 = -50 °C to +150 °C 6 = -200 °C to +600 °C
 2 = -50 °C to +200 °C **7 = -200 °C to +750 °C**
 3 = -200 °C to +300 °C 8 = -200 °C to +850 °C
 4 = -200 °C to +400 °C 10 = -70 °C to +1000 °C

Connection

S = SIL **FK = flat wire customer-specific**
I = insulated wire **SW = perpendicular wire**
K = customer-specific **L = insulate stranded wire**
W = wire **E = enameled Cu-wire**
FW = flat wire

Tolerance class

A = IEC 60751 F0.15 **K = customer-specific**
B = IEC 60751 F0.3 **P = pair**
C = IEC 60751 F0.6 **G = group**
Y = IEC 60751 F0.1

Wire length in mm

Special

T = substrate thickness 0.25 mm **M = metallized backside**
D = substrate thickness 0.38 mm **U = inverted welding**
R = round housing **S = special**
W = sintered powder

P W 1K0. 216. 7 W. B. 007



Innovative Sensor Technology IST AG, Stegrütistrasse 14, 9642 Ebnat-Kappel, Switzerland
 Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: info@ist-ag.com | www.ist-ag.com

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved

Application Note

RTD Platinum Sensor



Application Note

RTD Platinum Sensor

Content

1. General Information	6
2. Construction	6
3. Nominal Value and Temperature Coefficient	6
4. Long-term Stability	6
5. Temperature Characteristic Curve	6
6. Tolerance Classes IEC60751 Norm	7
7. Applied Current	7
8. Self-heating	7
9. Response Time	8
10. Dimensions Tolerances	8
11. Operating Conditions	9
12. Sensor Construction Examples	9
13. Additional Documents	10



Application Note

RTD Platinum Sensor

1. General Information

In many sectors, temperature is one of the most important physically defined parameters to determine product quality, security and reliability. Temperature sensors are produced with different technologies to fit specific application requirements. IST AG has concentrated on the development and manufacturing of high-quality thin-film temperature sensors. This know-how, partially derived from the semiconductor industry, allows IST AG to manufacture sensors in very small dimensions. Thin-film temperature sensors exhibit a very short response time due to their low thermal mass. The technologies and processes of IST AG thin-film sensors combine the positive attributes of traditional sensors - accuracy, long-term stability, repeatability and interchangeability within a wide temperature range. The advantages of thin-film mass-production create an optimal price/performance-ratio.

2. Construction

The temperature sensor consists of a high-purity platinum meander, structured on a ceramic substrate by the use of photolithography. The resistivity is laser-trimmed and precisely adjusted to the final value. The resistive structure is covered with a glass passivation layer protecting the sensor against mechanical and chemical damages. The welded lead wires are covered with an additional fixation layer.

3. Nominal Value and Temperature Coefficient

The nominal value of the sensor is the defined value of the sensor resistance at 0 °C. The temperature coefficient α (TCR) is defined as:

$$\alpha = \frac{R_{100} - R_0}{100 \times R_0} \quad [\text{K}^{-1}] \text{ according to the IEC60751, 2008-07 numerical value of } 0.00385 \text{ K}^{-1}.$$

Generally, the value is defined in ppm/K.

This example defines 3850 ppm/K¹⁾.

R_0 = resistance value in Ω at 0 °C

R_{100} = resistance value in Ω at +100 °C

1) Other TCRs available upon request

4. Long-term Stability

For all sensor types up to 7W (+750 °C), the change in ohmic value after 1000 hrs is less than 0.04 % at maximum operating temperatures.

5. Temperature Characteristic Curve

The curve determines the relationship between the electrical resistance and the temperature.

$$R(T) = R_0 (1 + A \times T + B \times T^2) \quad \begin{array}{l} 0 \text{ }^\circ\text{C to } +850 \text{ }^\circ\text{C} \\ R(T) = R_0 (1 + A \times T + B \times T^2 + C \times [T-100] \times T^3) \quad -200 \text{ }^\circ\text{C to } 0 \text{ }^\circ\text{C} \end{array}$$

Platinum (3850 ppm/K)	Platinum (3911 ppm/K)	Platinum (3750 ppm/K)	Platinum (3770 ppm/K)
$A = 3.9083 \times 10^{-3} \text{ }^\circ\text{C}^{-1}$	$A = 3.9692 \times 10^{-3} \text{ }^\circ\text{C}^{-1}$	$A = 3.8102 \times 10^{-3} \text{ }^\circ\text{C}^{-1}$	$A = 3.8285 \times 10^{-3} \text{ }^\circ\text{C}^{-1}$
$B = -5.775 \times 10^{-7} \text{ }^\circ\text{C}^{-2}$	$B = -5.829 \times 10^{-7} \text{ }^\circ\text{C}^{-2}$	$B = -6.01888 \times 10^{-7} \text{ }^\circ\text{C}^{-2}$	$B = -5.85 \times 10^{-7} \text{ }^\circ\text{C}^{-2}$
$C = -4.183 \times 10^{-12} \text{ }^\circ\text{C}^{-4}$	$C = -4.3303 \times 10^{-12} \text{ }^\circ\text{C}^{-4}$	$C = -6 \times 10^{-12} \text{ }^\circ\text{C}^{-4}$	

R_0 = resistance value in Ω at 0 °C

T = temperature in accordance with ITS 90



6. Tolerance Classes IEC60751 Norm

Temperature sensors are classified according to IEC60751, 2008-07.

Class	± deviations in °C	Temperature range of validity in °C*	IST AG reference
IEC60751 F 0.1	$0.10 + 0.0017 \times T $	0 to +150	Y
IEC60751 F 0.15	$0.15 + 0.002 \times T $	-30 to +300	A
IEC60751 F 0.3	$0.30 + 0.005 \times T $	-50 to +500	B
IEC60751 F 0.6	$0.60 + 0.01 \times T $	-50 to +600	C
1/5 IEC60751 F 0.3	$0.06 + 0.001 \times T $	upon request	K
1/10 IEC60751 F 0.3	$0.03 + 0.0005 \times T $	upon request	K

* Customer-specific temperature range available on request

|T| is the numerical value of the temperature in °C without taking leading signs into account.

The temperature curves refer to IEC60751 standards. The values in the table are for informative purposes only. Based on the assembly method and the different measurement conditions, accuracy, self-heating and response time may vary.

The measurement point is 5 mm from the wire end. For long wires (> 20 mm) the resistance is compensated (measured at room temperature) to ensure the correct resistance at the chip edge.

The resistance compensation of long wires (direct soldered or extended wires) has always to be taken into consideration for the end application. Exceptions are 3 or 4 wire solutions.

For 1/3 IEC60751, 1/5 IEC60751, 1/10 IEC60751 and 3- or 4-wire sensors please contact us.

7. Applied Current

The influence of the applied current is highly dependent on how the sensor is used in the application and can lead to significant self-heating effects. In general, the applied current should be as low as possible in order to reduce self-heating effects. The following values are typically used as measurement current:

100 Ω	500 Ω	1000 Ω	2000 Ω	10000 Ω
1 mA	0.5 mA	0.3 mA	0.2 mA	0.1 mA

Higher measurement currents can be applied as long as self-heating does not change the measurement value more than the needed measurement accuracy. The maximum current for sensors between 750°C and 1000°C should not exceed 1mA.

8. Self-heating

The electric current generates self-heating resulting in errors of measurement. To minimize the error, the testing current should be kept as low as possible. The measurement error caused by self-heating is dependent on temperature error $\Delta T = R \times I^2 / E$.

E = self-heating coefficient in mW/K, R = resistance in kΩ, I = measuring current in mA



9. Response Time

The response time is defined as the time in seconds the sensor needs to detect the change in temperature. $t_{0.63}$ describes the time in seconds the sensor needs to measure 63 % of the temperature change. The response time depends on the sensor dimensions, the thermal contact resistance and the surrounding medium.

Dimensions number	Response time in seconds						Self-heating			
	Water (v = 0.4 m/s)			Air (v = 1 m/s)			Water (v = 0 m/s)		Air (v = 0 m/s)	
	$t_{0.5}$	$t_{0.63}$	$t_{0.9}$	$t_{0.5}$	$t_{0.63}$	$t_{0.9}$	E in mW/K	ΔT in [mK] ¹⁾	E in mW/K	ΔT in [mK] ¹⁾
161	0.05	0.08	0.18	1	1.2	2.5	12	8.3	1.8	56
308	0.08	0.1	0.25	1.2	1.5	3.5	15	6.7	2.2	46
232 (thin substrate)	0.09	0.12	0.33	2.7	3.6	7.5	40	2.5	4	25
202	0.11	0.16	0.38	3.6	4.9	10.2	32	3.1	3.2	31
216	0.12	0.18	0.42	4	5.4	11	36	2.8	3.6	28
232	0.15	0.2	0.55	4.5	6	12	40	2.5	4	25
325	0.25	0.3	0.7	5.5	7.5	16	90	1.1	8	13
516	0.25	0.3	0.7	5.5	7.5	16	80	1.3	7	14
520	0.25	0.3	0.75	6	8.5	18	80	1.3	7	14
525	0.33	0.4	0.85	6.5	9	19	90	1.1	8	13
538	0.35	0.4	0.90	7.5	10	20	140	0.7	10	10
505	0.4	0.5	1.1	8	11	21	150	0.7	11	9
102	0.33	0.4	0.85	7.5	10.5	20	140	0.7	10	10
281	2.5	4.5	8	10	15	28	60	1.7	5.5	18
281*	2	2.5	5.5	10	12	22	45	2.2	4	25
451	8	10	22	12	22	40	85	1.2	8	13
451*	5	6	14	16	18	37	60	1.7	6.5	15
SMD 1206	0.15	0.25	0.45	3.5	4.2	10	55	1.8	7	14
SMD 0805	0.1	0.12	0.33	2.5	3	8	38	2.6	4	25
FC 0603	0.08	0.1	0.25	1.8	2.2	5.5	25	4	2.5	40

1) Self-heating ΔT [mK] measured with Pt100 at 1 mA applied current at 0 °C

* Two sensing elements in the same round ceramic housing

L: Sensor length (without connections)

H: Sensor height (without connections)

W: Sensor width

H2: Sensor height (incl. connections and strain relief)

10. Dimensions Tolerances

Sensor width (W) ± 0.2 mm
 Sensor length (L) ± 0.2 mm
 Sensor height (H2) ± 0.3 mm
 Sensor height (H) ± 0.1 mm

Wire length ± 1 mm (up to 30 mm)
 Wire length > 30 mm, tolerances according ISO 2768-1, tolerance class V (very coarse): see table below

Wire length in mm	31-120	121-400	401-1000	1001-2000	2001-4000
ISO 2768-1, tolerance class V (very coarse):	± 1.5 mm	± 2.5 mm	± 4 mm	± 6 mm	± 8 mm



11. Operating Conditions

Platinum temperature sensors are built on the basis of very robust materials: a high temperature glass protects the meander, the substrate is mainly based on densely sintered high-purity alumina and the wire fixations enable a reliable strain relief of the welding points.

Unfortunately it is not possible to test the sensor behavior in all application and installation conditions. Therefore the customer needs to test the compatibility of the sensor element with the application and/or the installation conditions. With certain ceramic casting compounds for instance there can occur chemical reactions between the passivation glass and the fixation glass. Potential problems can also arise due to strong creeping polymers (e.g. uncured silicones) or because of the reaction between plastic-based casting compounds with the plastic-based wire fixations, used for directly welded wires. The use of bare sensors in long-term humid environment as well as in aggressive atmospheres has to be avoided; the same applies to the direct dipping of the sensor into liquids. Furthermore mechanical pressure on the sensors, e.g. caused by hard or strong post-curing casting compounds should be avoided. Some epoxy-based casting compounds might become conductive above T_g and therefore cause a bypass via the sensor wires, which can lead to a lower resistance reading.

For sensors at higher temperatures ($> +600\text{ }^\circ\text{C}$) oxygen access should be guaranteed in order to counter post-oxidation-effects in stainless steel housings. Alternatively the construction should be chosen in a way that no significant decrease of the oxygen partial pressure might occur in the installation. In principle, stainless steel parts should be carefully cleaned and pre-oxidized.


IST AG also offers special (customer-specific) sensors for various applications. Please don't hesitate to contact us and ask for your suitable sensor solution.

12. Sensor Construction Examples

Wire



SIL

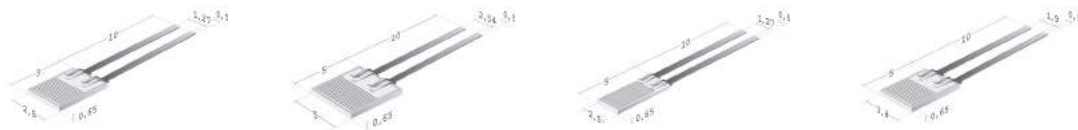

FlipChip and SMD



Minisens and Slimsens



Long wire, insulated wire and insulated stranded wire





Inverted wire and perpendicular wire



Round ceramic housing



13. Additional Documents

Document name:

English:

German:

Data Sheets:

DTP150_E	DTP150_D
DTP200_E	DTP200_D
DTP300_E	DTP300_D
DTP400_E	DTP400_D
DTP600_E	DTP600_D
DTP750_E	DTP750_D
DTP850_E	DTP850_D
DTP1000_E	DTP1000_D
DTPPW_E	DTPPW_D
DTPPW_4-Wire_E	DTPPW_4-Leiter_E
DTPPG_E	DTPPG_D
DTPSMD_E	DTPSMD_D
DTPFC_E	DTPFC_D
DTPBondSens_E	DTPBondSens_D
DTPRPT_E	DTPRPT_D
DTP_Round_Housing_E	DTP_Rundes_Gehaeuse_D



Innovative Sensor Technology IST AG, Stegrütistrasse 14, 9642 Ebnat-Kappel, Switzerland
Phone: +41 71 992 01 00 | Fax: +41 71 992 01 99 | Email: info@ist-ag.com | www.ist-ag.com

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes without previous announcement as well as mistakes reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • Typing errors and mistakes reserved • Product specifications are subject to change without notice • All rights reserved