



BondSens



Platinum sensor



One of the world's smallest platinum RTD



Benefits & characteristics




- Very small size
- Full platinum RTD stability according to IEC 60751
- Very low drift
- Designed for Au-wire bonding



- Perfect for high volume applications with high integration rate
- Optimal for wearables, temperature control of LEDs or high power ICs
- Integratable with semiconductor devices
- Customer-specific sensor available upon request



Illustration ¹⁾

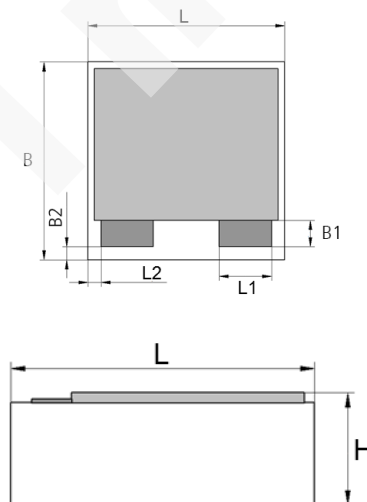

¹⁾ for actual size see dimensions in order information



Technical Data



Operating temperature range: -50 °C to +150 °C



Nominal resistance:* 1000 Ω at 0 °C



Characteristics curve:* 3850 ppm/K



Tolerance class: * **iST reference**
(dependent on temperature range) IEC 60751 F0.3 B



Connection:* 3FC Au-Pads (bonding pads)



Recommended applied current:²⁾ 0.3 mA


²⁾Self-heating must be considered



Special: For dry environments only

* Customer-specific alternatives available

Product Photo



Order Information

Nominal Resistance	Size	Dimensions (L / L1 / L2 x W / W1 / W2x H in mm)	Class*	Order code	Product name (secondary reference)	Wire length in mm	Special
3FC (Au-Pads - bonding pads)							
1000 Ω	0707	0.75 / 0.2 / 0.05 x 0.75 / 0.1 / 0.05 x 0.3 (± 0.1)	F0.3 (class B)	104316	P1K0.0707.3FC.B.T	N/A	

Additional Documents

Application Note

Document name: ATP_E



Innovative Sensor Technology IST AG • Stegrütistrasse 14 • 9642 Ebnat-Kappel • Switzerland
+41 71 992 01 00 • info@ist-ag.com • www.ist-ag.com

All mechanical dimensions are valid at 25 °C ambient temperature, if not differently indicated • All data except the mechanical dimensions only have information purposes and are not to be understood as assured characteristics • Technical changes or product specifications without previous announcement reserved • The information on this data sheet was examined carefully and will be accepted as correct; No liability in case of mistakes • Load with extreme values during a longer period can affect the reliability • The material contained herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner • All rights reserved.